


PRODUCT INFORMATION

MONOTEX L 250 BG

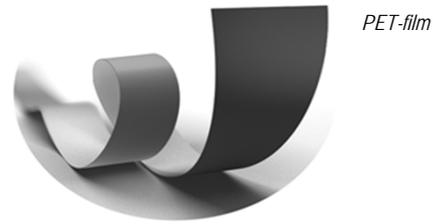

PROPERTY	UNITY		TOLERANCE	STANDARD
Weight	g/m <sup>2</sup>	360	± 10 %	ISO 4591
Thickness	µm	260	± 10 %	ISO 4593
Smoothness (Bekk)	1.Side 2.Side	s 20 20	min.	ISO 5627
Heat resistance	°C	- 40 to + 180, 30 Min.		
Opacity	%	95	min	ISO 2471
Tensile strength	along cross	MPa 80 80	min.	ISO 527-1
Weight of coating	g/m <sup>2</sup>	5 each Side	± 1	Féron intern

This product features a good water resistance without mechanical load.

**Printability:**

Flexo, Offset, Silk screen printing, thermaltransfer printing, laser printing.

The product must be stored at standard climate conditions (23 °C / 50 % relative humidity).

Unless otherwise agreed upon, the suitability of our products supplied for the specific production process or application is not a term of the sales contract. The customer alone is responsible for testing our products with regard to his particular application.

The above information corresponds to our current state of knowledge. Our products are subject to modification when mandatory caused by e.g. adjustment of legal requirements or raw material modifications of our suppliers.

All values stated above are to be considered as average values. This is not a specification. We reserve the right to make technical changes.